


STEEL STRAPPING TOOL

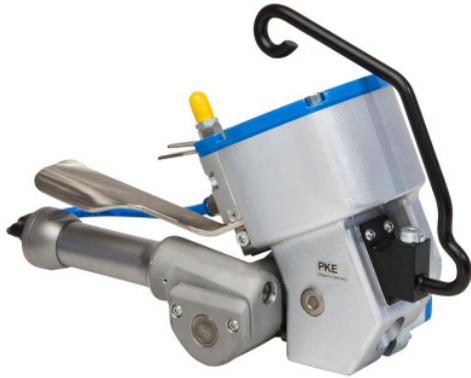

SEAL-LESS JOINT PKD

The PKD Masters heavy-duty strapping applications with pneumatic ease, unmatched joint performance, safety, reliability and cost saving. The innovative safety joining technology prevents the joint from being pushed open. PKD's tensioning force meets even the highest demands of heavy industry.

Technical Data

Kind of drive (tensioning)	Pneumatic
Tension force	up to 14,000 N
Strap feeding speed	0.08 m/s 0.26 ft/s
Kind of drive (sealing)	Pneumatic
Dimensions	460 x 300 x 350 mm (L x W x H) 18.1 x 11.8 x 13.8" (L x W x H)
Weight	25.4 kg 56.0 lb
Air pressure	max. 6.5 bar flow pressure
Air consumption (during tensioning)	0.6 m ³ / min. 21.18 ft ³ / min.
Cross-section	G 3/8"
Handarm vibration	information currently not available
Noise level	information currently not available

Strap/Joint

Type of strap	Steel strap
Strap	Automatenband MEGABAND®
Strap width	19, 25, 32 mm 3/4" ; 1" ; 1 1/4"
Strap thickness	0,80 (for MEGABAND®) 0.80 - 1.00 mm (for Automatenband) 0.031" (for MEGABAND®) 0.031 - 0.039" (for Automatenband)
Kind of seal	Sealless-joint
Sealing strength (depending on strap quality, strap dimensions)	approx. 80% of the strap breaking load

Minimum Bearing Area

Hexagon pipe bundle	150 mm 5.9"
Flat package	290 mm 11.4"

Application

for strapping of heavy packages like sectional steel, packages of bricks, paper, wood, etc



Factory Address
Plot No. G28 & G29, General Park IP,
Sultanpur Medical Devices Park,
Telangana 502 319

Corporate Address
Shantha Jubilee, Jubilee Enclave,
HITEC City, Hyderabad,
Telangana 500 081

Contact +91 93939 22442
E-mail info@acmeirm.com
Website www.mvsips.com

